



# Host Processor

## MPC7410


### **Not Recommended for New Designs**

This page contains information on a product that is not recommended for new designs.

Last Updated: Apr 9, 2022

The MPC7410 Host Processor is a high-performance, low-power, 32-bit processor built on Power Architecture technology with a full 128-bit implementation of Our AltiVec®™ technology. This creates a microprocessor ideal for leading-edge computing, embedded network control, and signal processing applications. The MPC7410 offers the high-bandwidth MPX bus with minimized signal setup times and reduced idle cycles to increase maximum operating frequency to over 100 MHz, in addition to increased address and data bus bandwidth. To maintain compatibility for existing designs, the MPC7410 also supports the 60x bus protocol. MPC7410 microprocessors offer single-cycle double precision floating-point performance, full symmetric multi-processing (SMP) capabilities, and support for up to 2MB of backside L2 cache. While the MPC7410 is software-compatible with existing MPC603e, MPC740, and MPC750 microprocessors, to utilize the full potential of the AltiVec technology changes to existing source code is required.

## MPC7410 Block Diagram Block Diagram

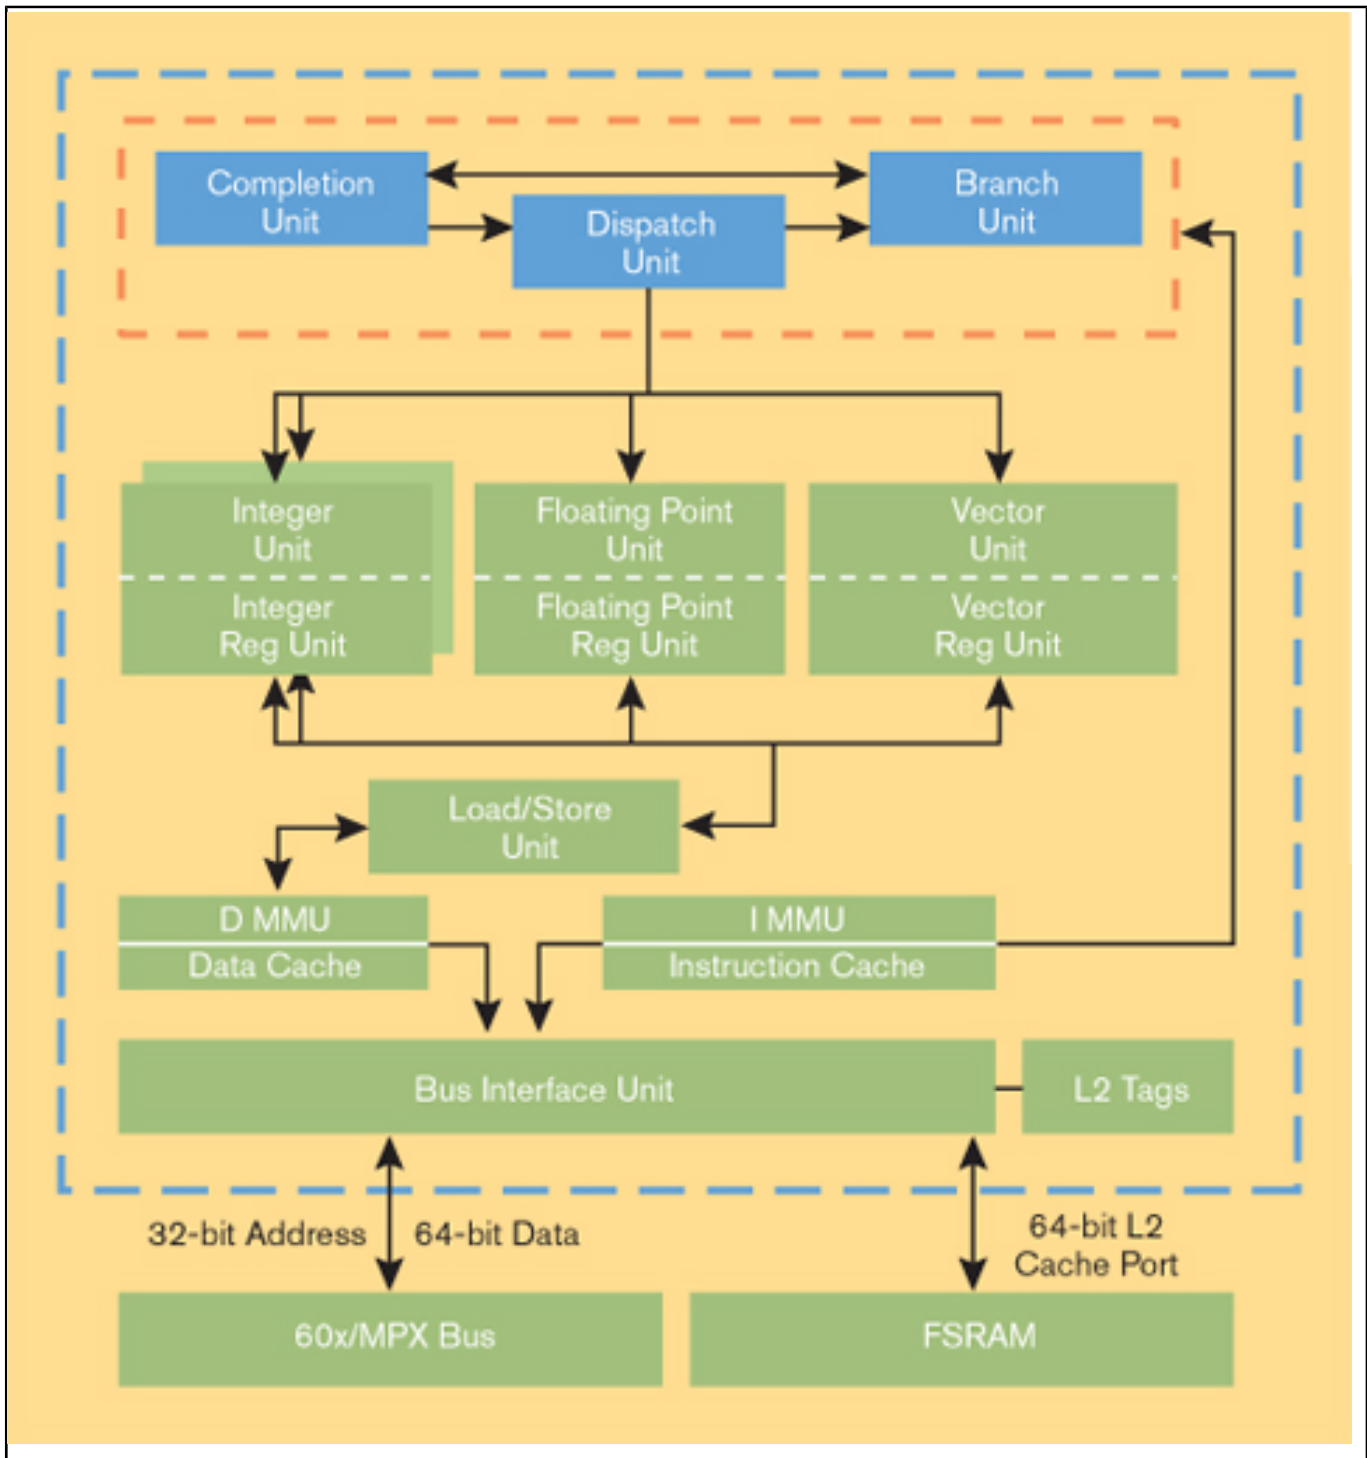

View additional information for [Host Processor](#).

Note: The information on this document is subject to change without notice.

**[www.nxp.com](http://www.nxp.com)**

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2024 NXP B.V.